



# Reveal Merchandiser® with Doors ORMC83D Hybrid™ Specs

Hybrid™ Multi-Decks with 24" x 69" CoolView® Ultra™ Doors  
ORMC83D-(B/D/P): D=Doors-(B=Beverage, D=Dairy/Deli, P=Produce)

## R-404A Refrigerant

## R-448A Refrigerant

### Standard Package

Refrigeration Data	
Refrigerant Charge (lbs.) <sup>1</sup>	
Zero Zone Condensing Unit #	
Condensing Unit Crated Weight (lbs.)	
Electrical & Energy Data <sup>2, 3, 4, 5</sup>	
MOCP (amps) <sup>6</sup>	
MCA (amps) <sup>7</sup>	
Daily Energy Use (kWh)	
Rejected Heat (Btu/h) <sup>8</sup>	
Electrical & Energy Data <sup>2, 3, 4, 5</sup>	
MOCP (amps) <sup>6</sup>	
MCA (amps) <sup>7</sup>	
Daily Energy Use (kWh)	
Rejected Heat (Btu/h) <sup>8</sup>	

8' (4-Door)	12' (6-Door)
4.0	6.2
69-10324	69-10045
66	120
With Condensate Removal System	
15	15
13.1	15.0
12.3	18.8
1,752	2,678
Without Condensate Removal System	
15	15
7.8	9.8
11.9	18.2
1,695	2,593

8' (4-Door)	12' (6-Door)
4.0	6.0
69-10235	69-10237
66	120
With Condensate Removal System	
15	15
13.1	15.0
11.5	17.6
1,633	2,502
Without Condensate Removal System	
15	15
7.8	9.8
11.1	17.0
1,576	2,416

### Physical Data

Case Calculations
Weight (lbs.) <sup>9</sup>

8' (4-Door)	12' (6-Door)
1,020	1,254

8' (4-Door)	12' (6-Door)
1,020	1,254

#### Notes:


1. Refrigerant charge includes combined condensing unit and case charges.
2. Data based on LED lighting (Zero Zone ChillBrite® 5), no-energy French-swing doors (Zero Zone CoolView® Ultra™), and ECM or SSC electronic fan motors. **See separate remote case spec sheets for more details.**
3. 208V 4-wire service; 115/208V-1PH-60HZ; red & black power, white neutral, green ground. Buck/boost transformer available for low voltage conditions.
4. Optional main service disconnect is available upon request.
5. Energy data provided is for dairy/produce application.
6. MOCP = Maximum over-current protection.
7. MCA = Minimum current amps.
8. Adequate ventilation must be provided to dissipate rejected heat from the top of the unit for proper performance. Clearance of less than 30" above the top of the shroud to the ceiling requires special design considerations. See Zero Zone Hybrid™ Installation & Operation Manual for specific details.
9. Does not include weight of condensing unit. Weights include 2 end panels at 30 lbs. per pair.





# Reveal Merchandiser® with Doors ORMC83D Hybrid™ Specs

Hybrid™ Multi-Decks with 24" x 69" CoolView® Ultra™ Doors  
 ORMC83D-(B/D/P): D=Doors-(B=Beverage, D=Dairy/Deli, P=Produce)

Case Size	Length	w/ 2 End Panels
8' (4-Door)	96"	99"
12' (6-Door)	144"	147"

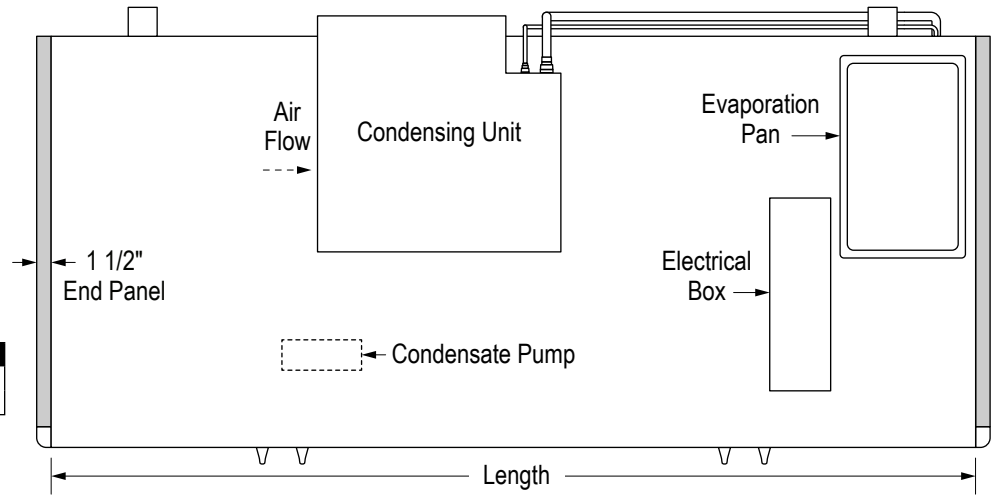

Lower position increases case depth to 49 7/8"

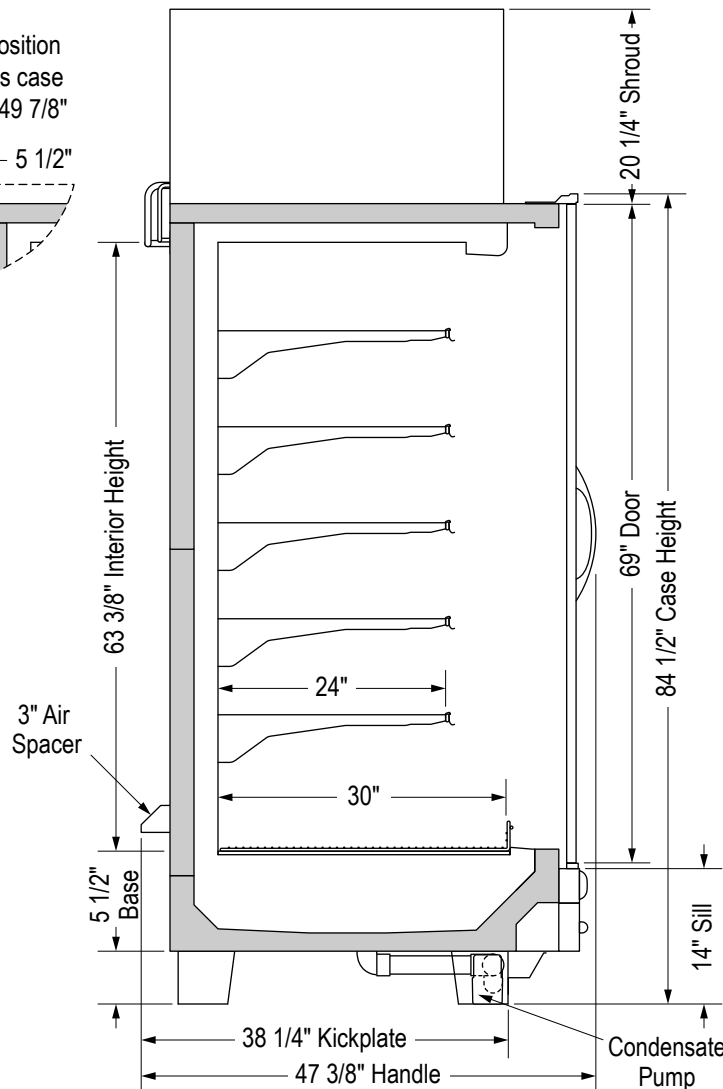

Optional base configurations are available to fit case through doorways as low as 80". Consult the factory for details.

SS-120-B Specifications are subject to change without notice. All dimensions are nominal. Case designed to operate in an ambient temperature of 75°F and relative humidity of 55% or lower. Reveal Merchandiser® is a registered trademark of Zero Zone, Inc. in the United States. 7/29/2022



Zero Zone, Inc.  
 800-247-4496 • www.zero-zone.com  
 © 2022 Zero Zone, Inc.

